






4 KADEMELİ ALTAN ÇATALLI BORU MAFSALLI (TİP D)


Fork articulated with pipe at bottom from 4 stages (Type D)

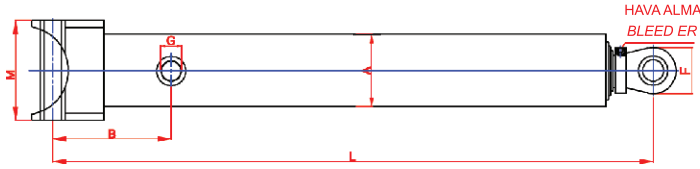

4 KDM Ø75

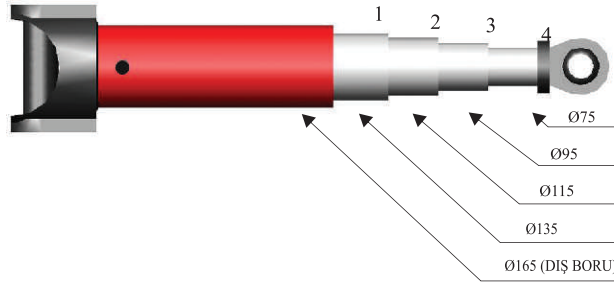

4 KDM Ø95

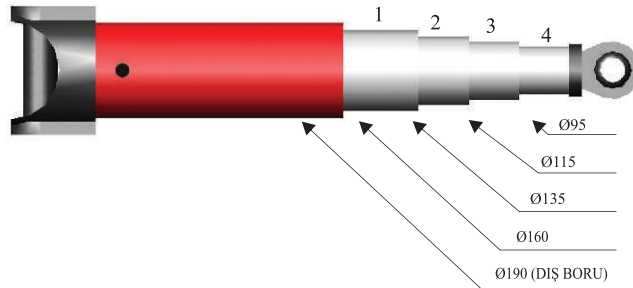



TİP (TYPE)	ØA	ØD	ØE	F	G	B	L	S	M	H STROK	KG	MAX.ÇALIŞMA BASINCI (BAR)	YAĞ HACMI (Lt.)
4x2700xØ75	165	50	50	105	R ³ / ₄ "	205	1000	40	215	2700	121	170	31
4x3600xØ75	165	50	50	105	R ³ / ₄ "	205	1200	40	215	3660	146	170	36
4x4000xØ75	165	50	50	105	R ³ / ₄ "	205	1360	40	215	4000	173	170	42
4x4000xØ95	190	50	50	110	R ³ / ₄ "	235	1370	40	245	4000	218	170	57
4x4500xØ75	165	50	50	105	R ³ / ₄ "	205	1515	40	215	4428	205	170	50
4x4500xØ95	190	50	50	110	R ³ / ₄ "	235	1530	40	245	4428	243	170	66

Kapalı boy ve strok ölçüleri talebe göre değiştirilebilir.
Length and stroke dimensions are subject to change according to demand closed




5 KADEMELİ ALTAN ÇATALLI BORU MAFSALLI (TİP D)


Fork articulated with pipe at bottom front 5 stages (Type D)

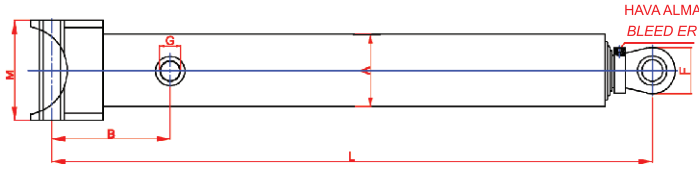

5 KDM Ø75

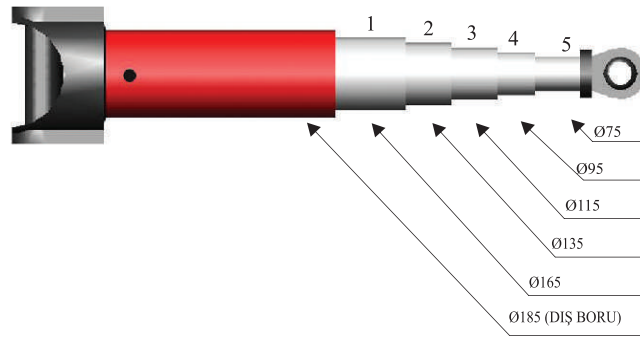

5 KDM Ø95

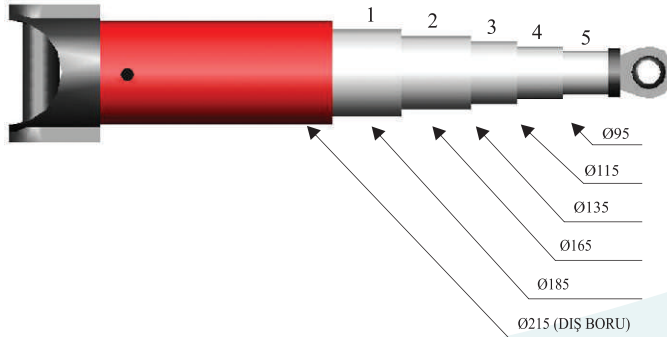

TİP (TYPE)	ØA	ØD	ØE	F	G	B	L	S	M	H STROK	KG	MAX.ÇALIŞMA BASINCI (BAR)	YAĞ HACMİ (L.)
5x5000xØ75	190	50	50	105	R $\frac{3}{4}$ "	205	1370	40	230/245	5000	223	170	68
5x5000xØ95	220	50	50	110	R $\frac{3}{4}$ "	235	1370	40	270	5000	295	170	95
5x5700xØ75	190	50	50	105	R $\frac{3}{4}$ "	250	1530	40	245	5535	260	170	96
5x5700xØ95	220	50	50	110	R $\frac{3}{4}$ "	250	1530	40	270	5508	315	170	105

Kapalı boy ve strok ölçüleri talebe göre değiştirilebilir.
Length and stroke dimensions are subject to change according to demand closed